


| Item | Qty. | Description |
|------|------|---------------------------------------|
| 1 | 1 | 41.5" RSG540 Vertical Extrusion |
| 2 | 1 | 41.5" RSG540 Vertical Extrusion |
| 3 | 1 | 35.5" RSG540 Vertical Extrusion |
| 4 | 1 | 35.5" RSG540 Vertical Extrusion |
| 5 | 4 | 16" Z45 Horizontal Extrusion |
| 6 | 2 | 42.9" Z45 Curved Horizontal Extrusion |
| 7 | 2 | 34.9" Z45 Curved Horizontal Extrusion |
| 8 | 4 | 37.9" Z45 Vertical Extrusion |

Steps:

- 1) Assemble front panel by locking 3 verticals [8] to lower curved horizontal [6], insert **infills**, and lock in place with upper curved horizontal [6].
- 2) Connect verticals [1,4] and [2,3] with horizontals [5], inserting **infills** as shown.
- 3) Connect assembled sides [1/4] and [2/3] with assembled front panel, locking curved horizontals [6] to verticals [1,2].
- 4) Connect verticals [3,4] with lower curved horizontal [7] as shown.
- 5) Lock vertical [8] to lower curved horizontal [7], insert **infills**, and lock in place with upper curved horizontal [7] as shown.
- 6) Attach **shelf supports** to velcro on inside of verticals [1-4].
- 7) Place shelf on **shelf supports**.
- 8) Slide counter top over front verticals [1,2] and secure **Plex** shelf to verticals with screw caps.
- 9) Attach literature racks as desired.


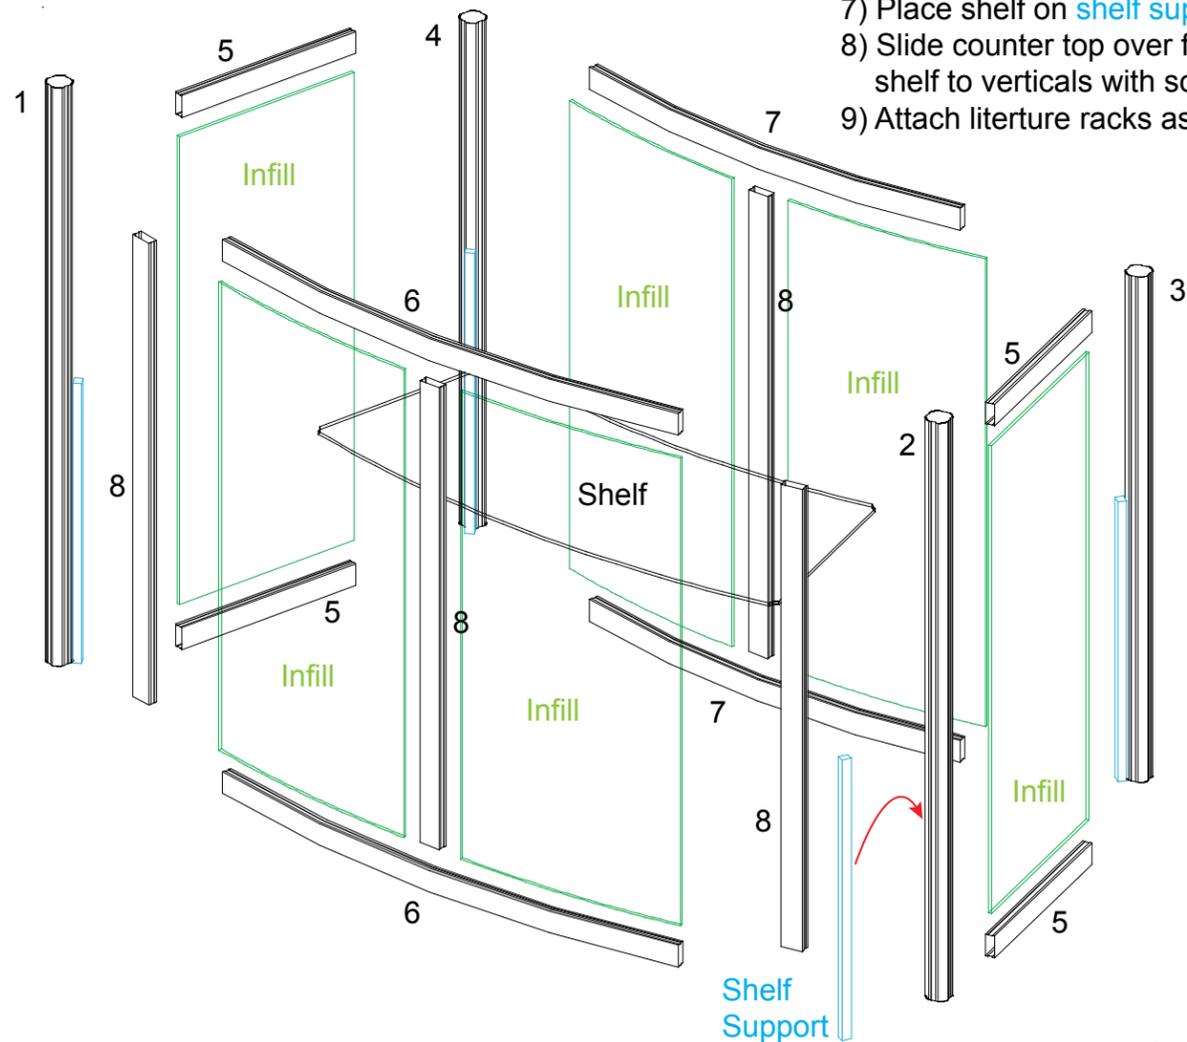


Screw Cap

Plex Shelf

Counter Top

Literature Rack Attachment

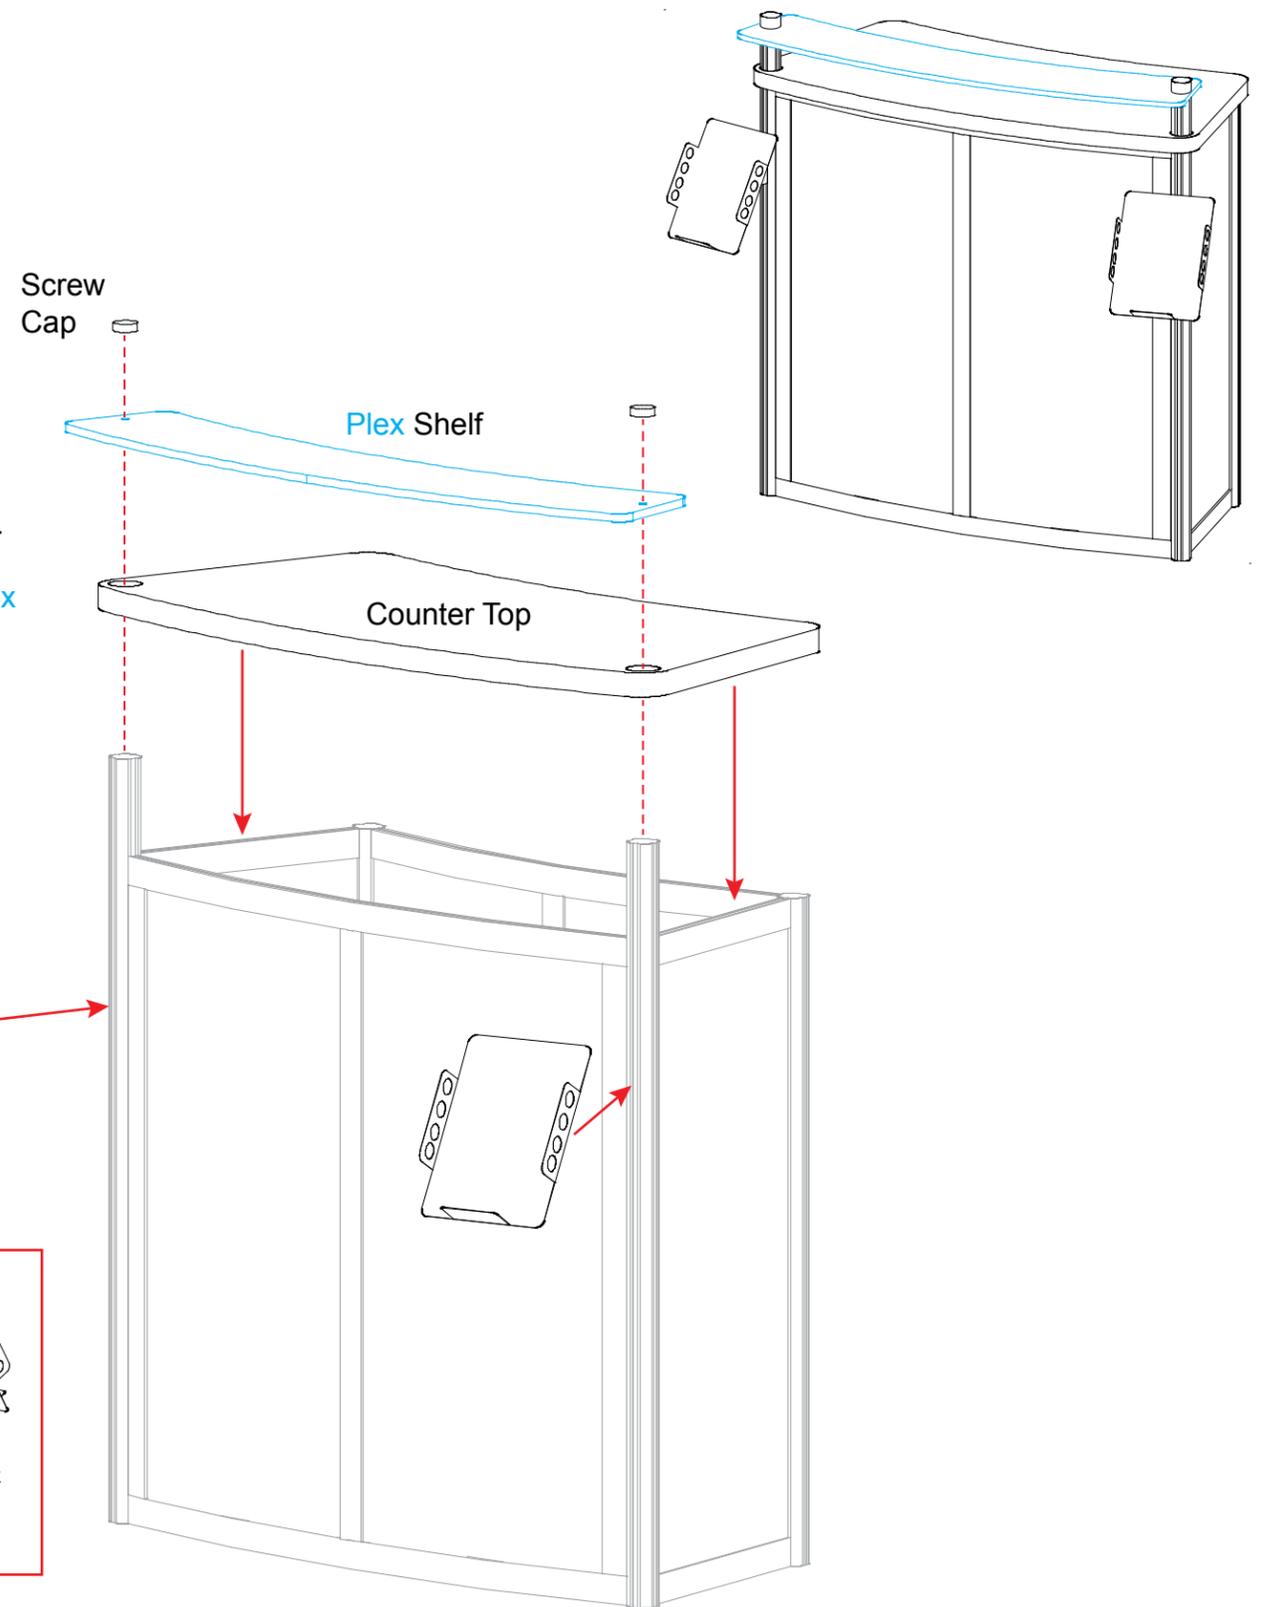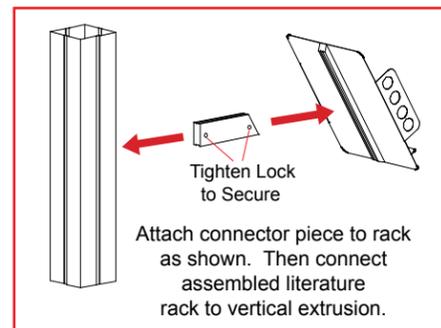

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING



Using Your Setup Instructions

The Visionary Designs Setup Instructions are created specifically for your configuration. They are laid out sequentially, including an exploded view of the entire display, and then a logical series of detailed steps to assemble the main structure and components. We encourage you to study the instructions **before** attempting to assemble your exhibit.

Each page reminds you to tighten the setscrews after disassembling your exhibit to prevent loss of the locks and setscrews (see below in RED). This is VERY IMPORTANT.

Cleaning and Packing Your Display


- 1) Use care when cleaning aluminum extrusion or acrylic inserts. Use only non-abrasive cleaners.
- 2) When cleaning laminate inserts or countertops, use mild cleansers and a soft material such as cotton.
- 3) Keep all display components away from extreme heat and long exposure to sunlight to avoid warping and fading.
- 4) Retain all packing material. It will make re-packing much easier and will reduce the likelihood of shipping damage.



Most Visionary Designs exhibits can be assembled with the supplied Hex Key Tool. Occasionally, a flat head screwdriver may be required.




Most horizontal extrusion connections have a patented expandable lock. This lock inserts into the groove of an opposing extrusion. Tightening the lock with the Hex Key Tool expands the lock and creates a strong positive connection.

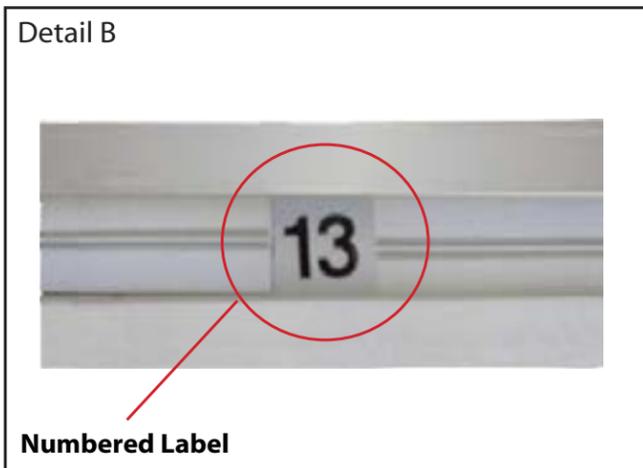


Each extrusion contains a numbered label which corresponds with setup instructions. The label is located within a groove of the extrusion (when possible). With Visionary Designs the labels contain Black numbers unless otherwise specified.



Remove only (1) setscrew when disassembling. Replace setscrew in extrusion after assembling it. Before packing, replace setscrew in extrusion to avoid losing it.

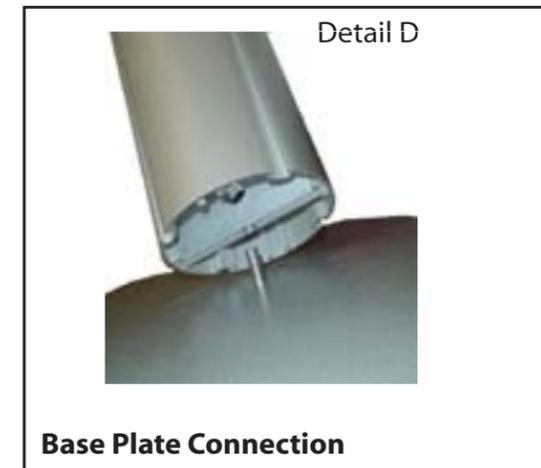

Attach base plate to round or square vertical extrusion using the bolt provided. Be careful not to strip the threads.

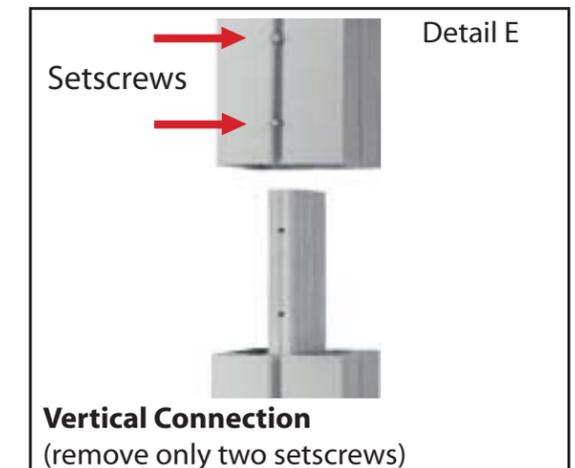

When vertical extrusions are packed in portable cases rather than crates or tubs, they must be broken down into smaller sections which then require assembly.


Remove only (2) setscrews when disassembling. Replace setscrews in extrusion after assembling it. Before packing, replace setscrews in extrusion to avoid losing them.

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING


Top View




Level 1

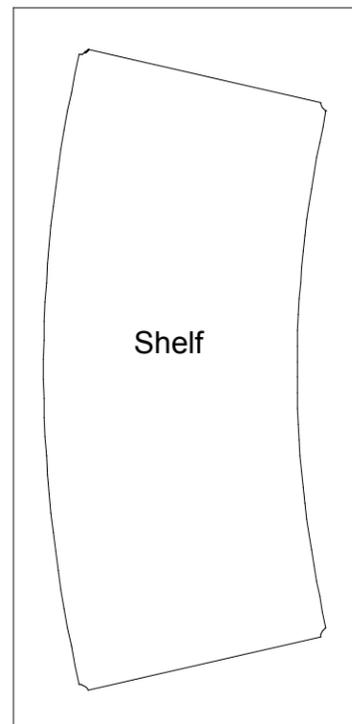


Level 2

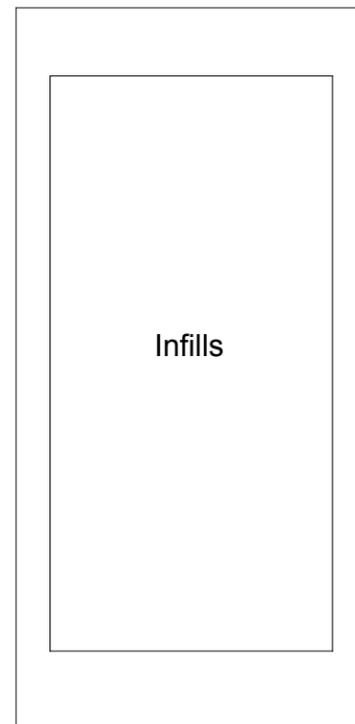


Level 3

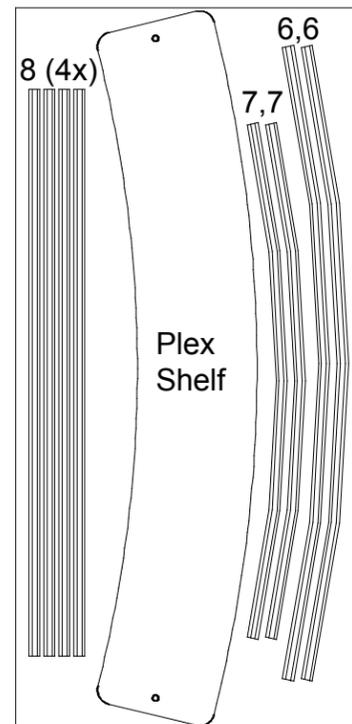

Level 4

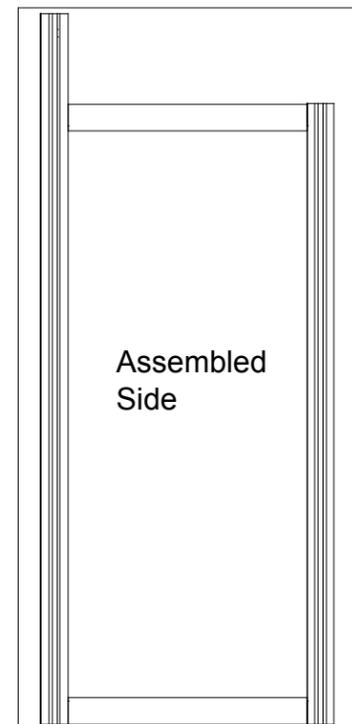

Level 5

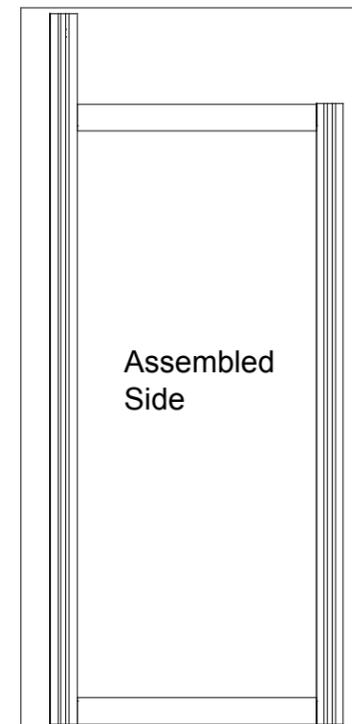

Level 6



Setup Hardware

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING