

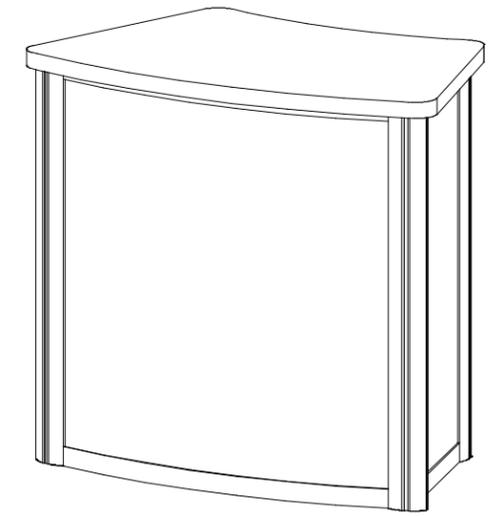


Item	Qty.	Description
1	2	38" Vertical Extrusion
2	1	38" Vertical Extrusion w/ Door Stop
3	1	38" Vertical Extrusion w/ S44
4,4A	2,2	18" Z45 Horizontal Extrusion
5,5A	1,1	34.44" Z45 Curved Horizontal Extrusion
6,6A	1,1	24.5085" Z45 Curved Horizontal Extrusion



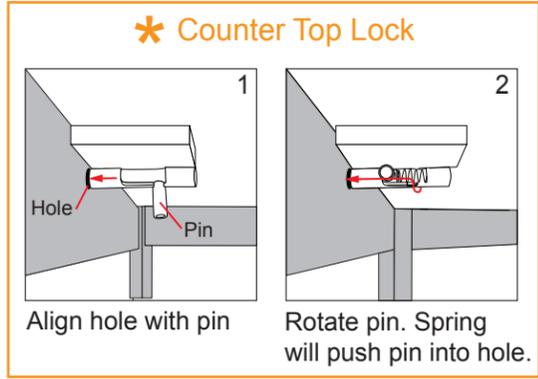


Completed Assembly

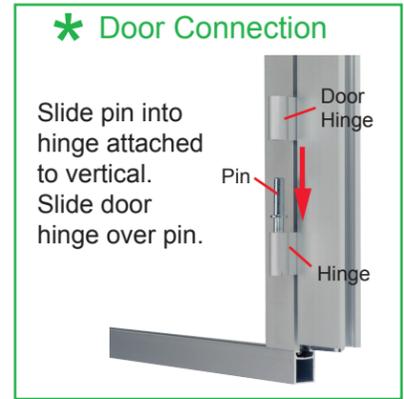

Steps:

- 1) Connect horizontals [4] [5] [6] & [6A] between verticals [1] [2] & [3].
- 2) Place **infills** on top of horizontals [4] [5] & [6] then secure with horizontals [4A] [5A] & [6A]. Note: Velcro must face inside of assembled counter.
- 3) Connect door to vertical [3]. See **Door Connection** detail.
- 4) Connect **shelf supports** to Velcro on **infills**.
- 5) Place shelf on top of supports.
- 6) Place counter top on top of horizontals [4A] & [5A]. See **Counter Top Lock** detail.
- 7) Attach power cords for USB Port charging assembly.

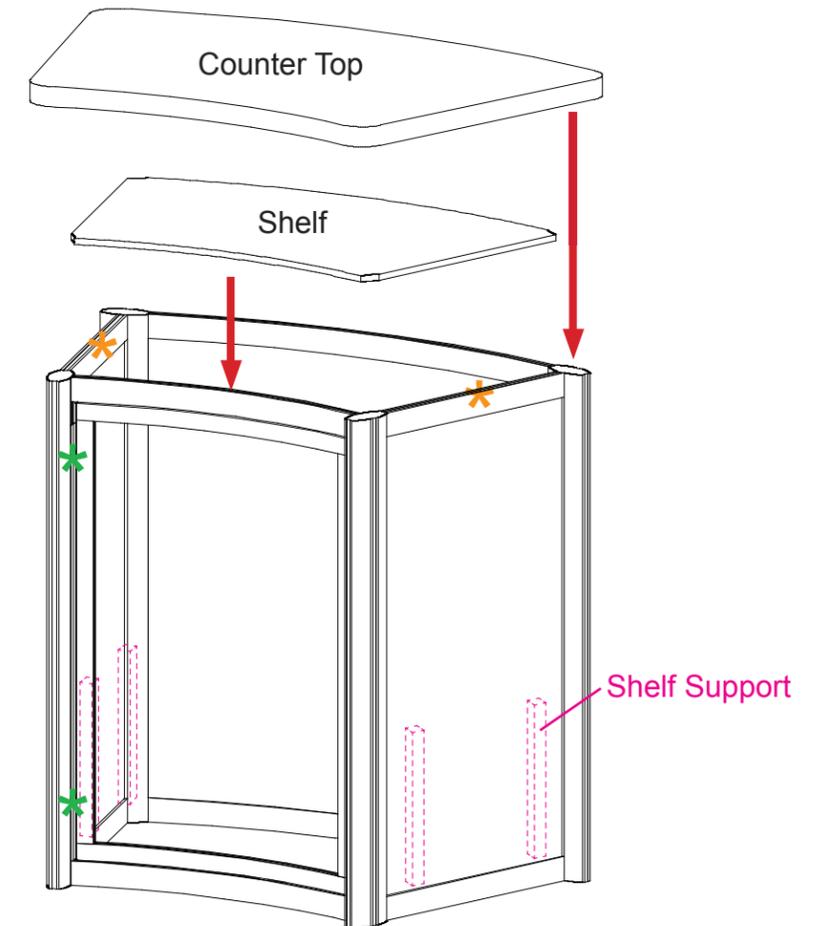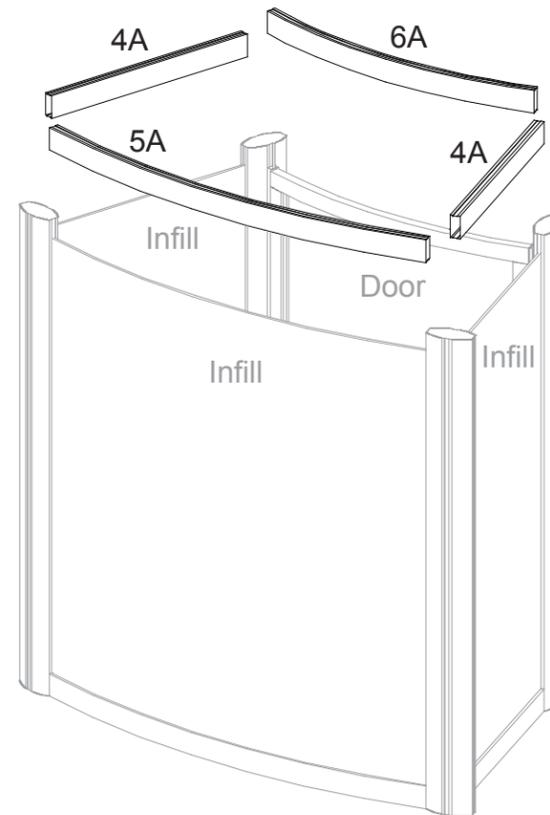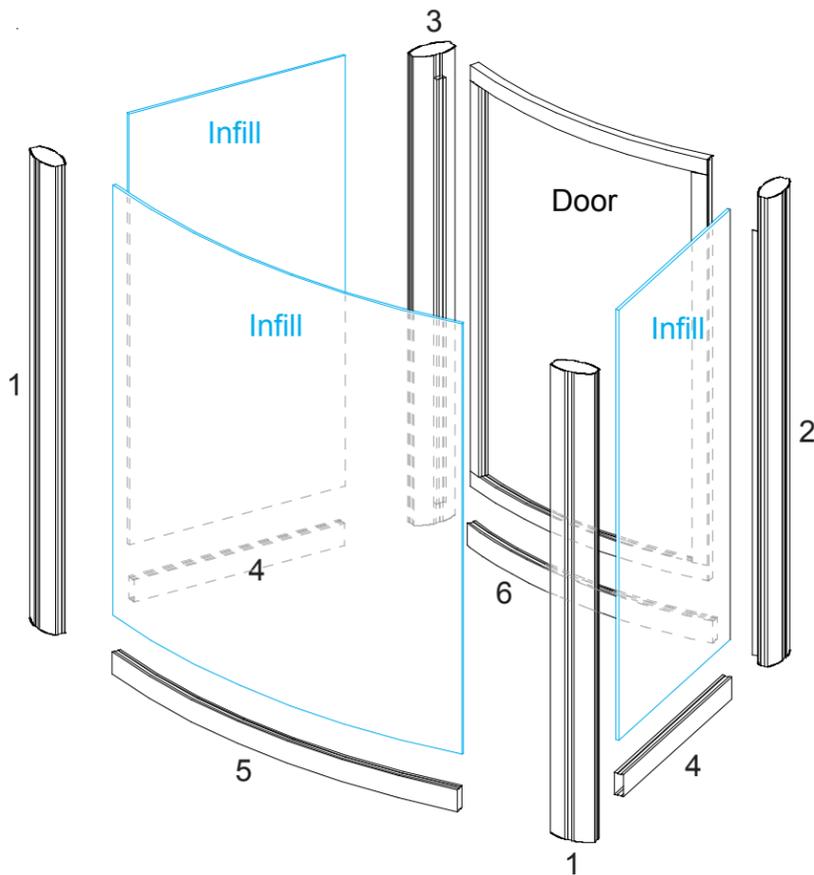

General Setup Instructions


- Read entire setup instruction manual prior to unpacking parts and pieces.
- The setup instructions are created specifically for this configuration.
- Setup instructions are laid out sequentially in steps, including exploded views with detailed explanation for assembly.

Cleaning & Packing


- For Cleaning Metal, Plex, & Laminate Parts: Use a **MILD NON-ABRASIVE** cleanser and soft cloth/paper towel to clean all surfaces.
- Keep exhibit components away from heat and prolonged sun exposure.
Heat and UV exposure will warp and fade components.
- Retain all provided Packing Materials. All provided packing materials are for ease of repacking & component protection.

Disassembly


- For loss prevention, tighten all setscrews and locks during disassembly

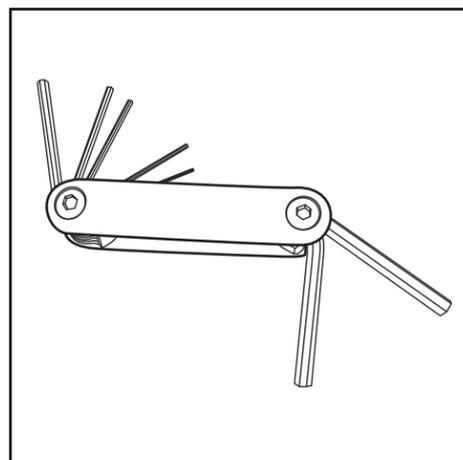


Hex Tool - Essential for Assembly

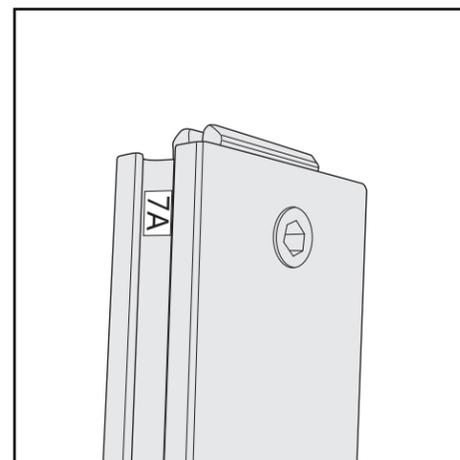


Part Identification - Numbering

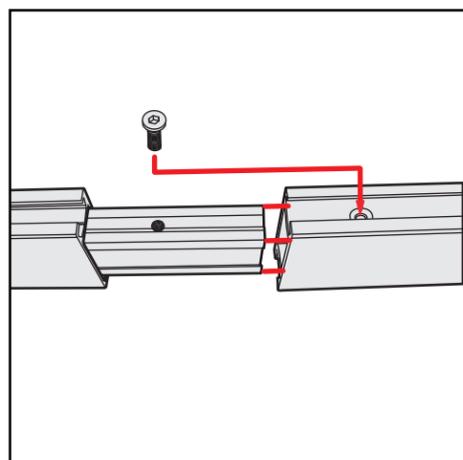


Spline Connection

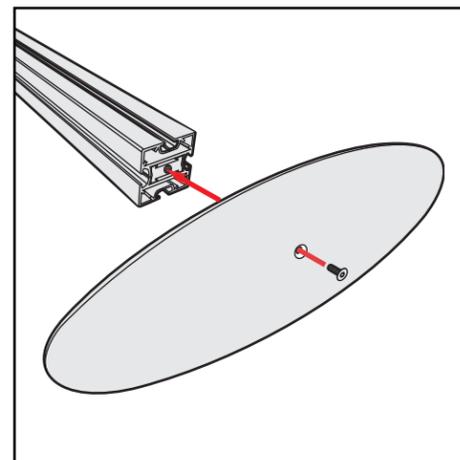

Base Plate & Extrusion Connection

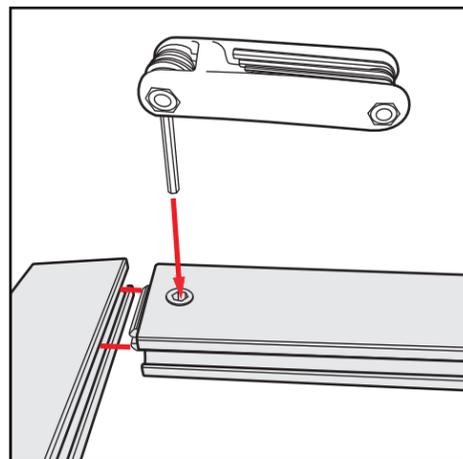

Extrusion & Lock Connection

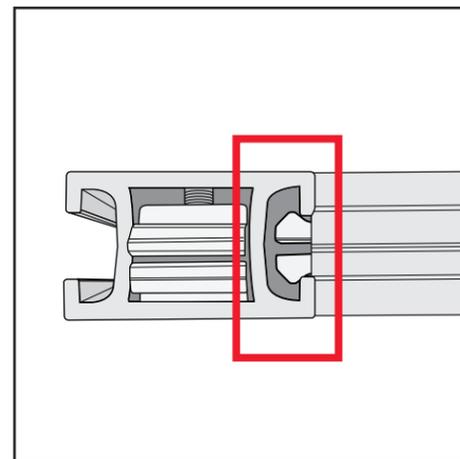

Engaged Lock



WARNING



DO NOT USE POWER TOOLS



LADDERS OR LIFTS
MAY BE REQUIRED



ALL CONNECTIONS MUST
BE TIGHTLY SECURED