


Plan View

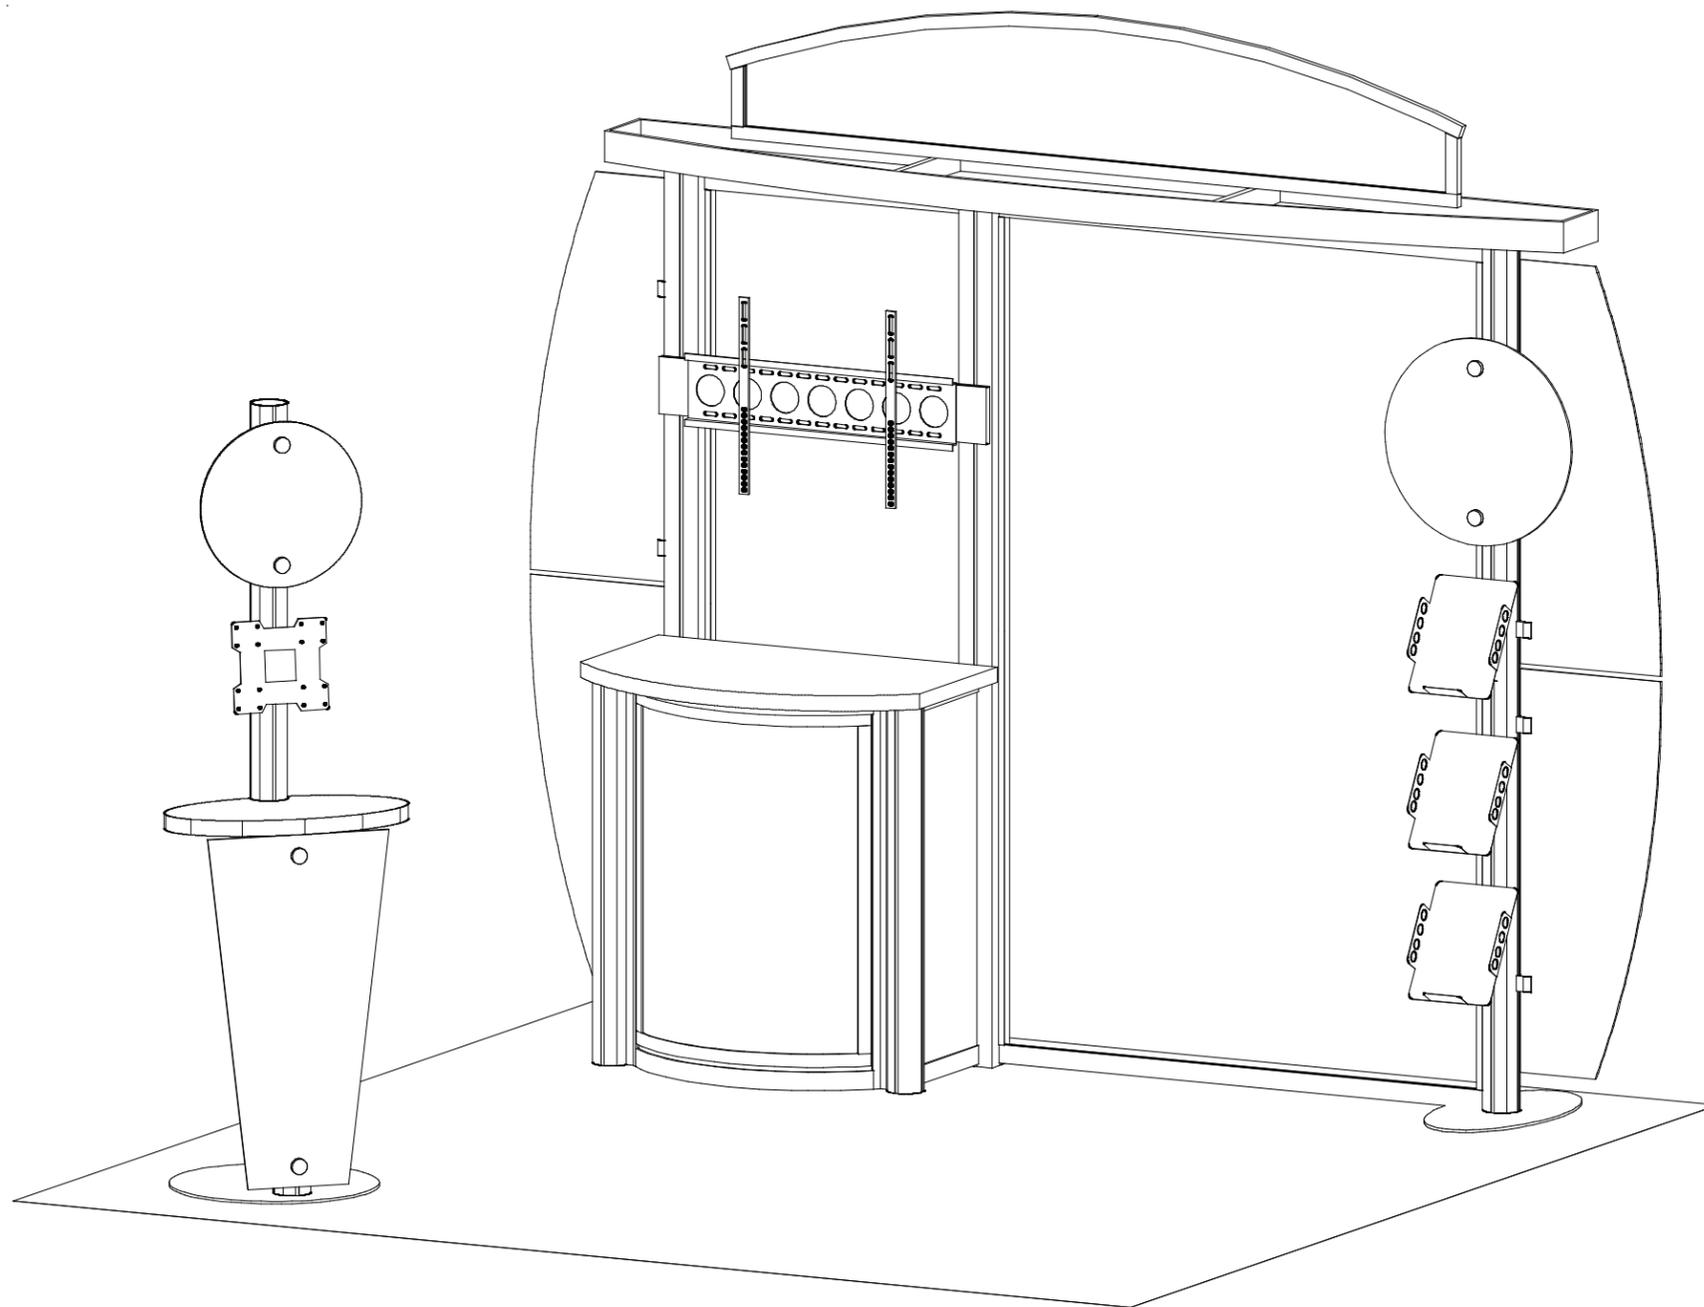

General Setup Instructions


- Read entire setup instruction manual prior to unpacking parts and pieces.
- The setup instructions are created specifically for this configuration.
- Setup instructions are laid out sequentially in steps, including exploded views with detailed explanation for assembly.

Cleaning & Packing


- For Cleaning Metal, Plex, & Laminate Parts: Use a **MILD NON-ABRASIVE** cleanser and soft cloth/paper towel to clean all surfaces.
- Keep exhibit components away from heat and prolonged sun exposure.
Heat and UV exposure will warp and fade components.
- Retain all provided Packing Materials. All provided packing materials are for ease of repacking & component protection.

Disassembly


- For loss prevention, tighten all setscrews and locks during disassembly

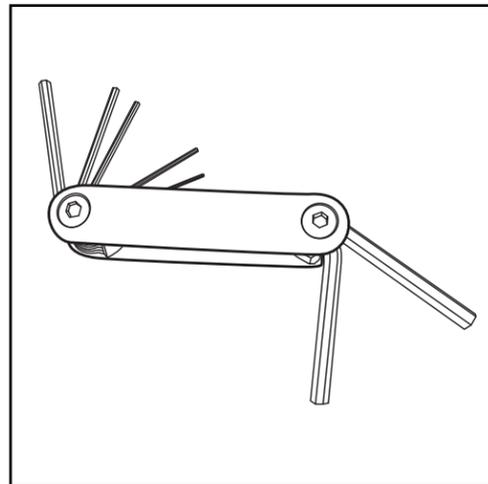


Hex Tool - Essential for Assembly

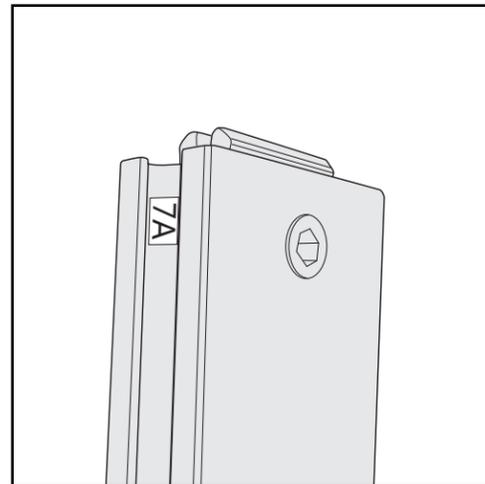


Part Identification - Numbering

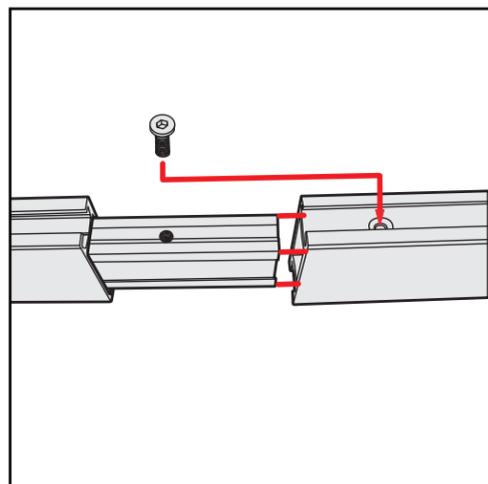


Spline Connection

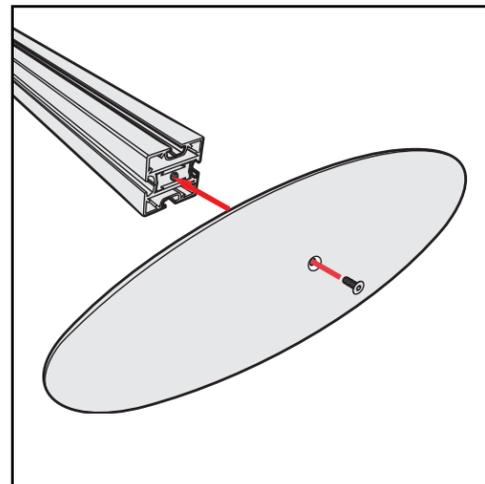

Base Plate & Extrusion Connection

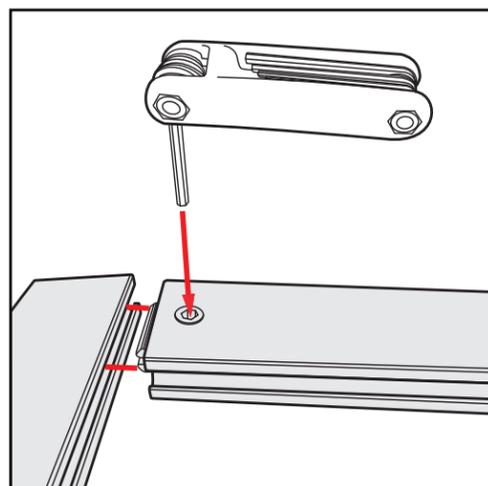

Extrusion & Lock Connection

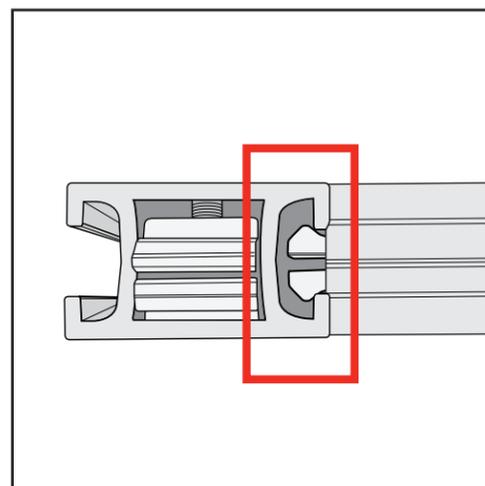

Engaged Lock



WARNING



DO NOT USE POWER TOOLS




LADDERS OR LIFTS
MAY BE REQUIRED



ALL CONNECTIONS MUST
BE TIGHTLY SECURED




Level 1

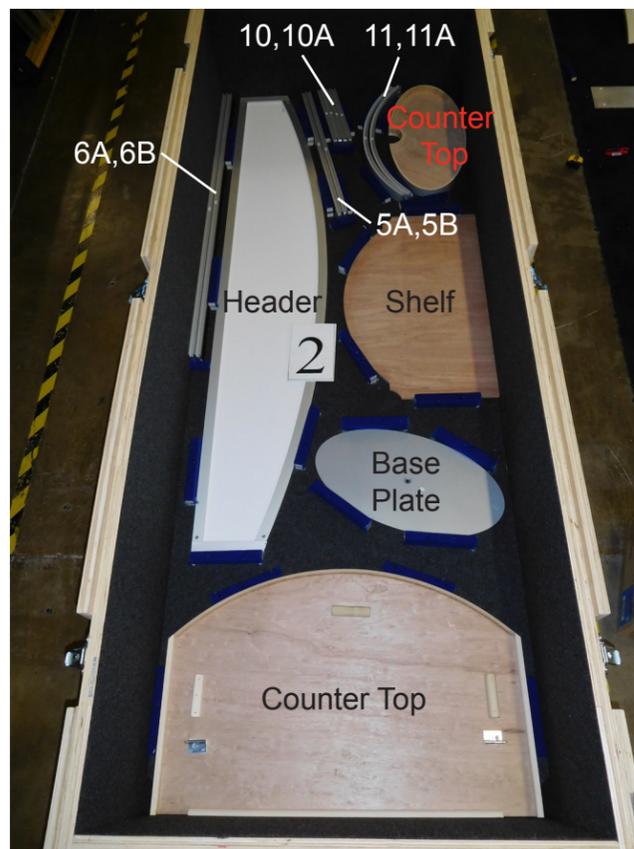

Level 2



Level 3

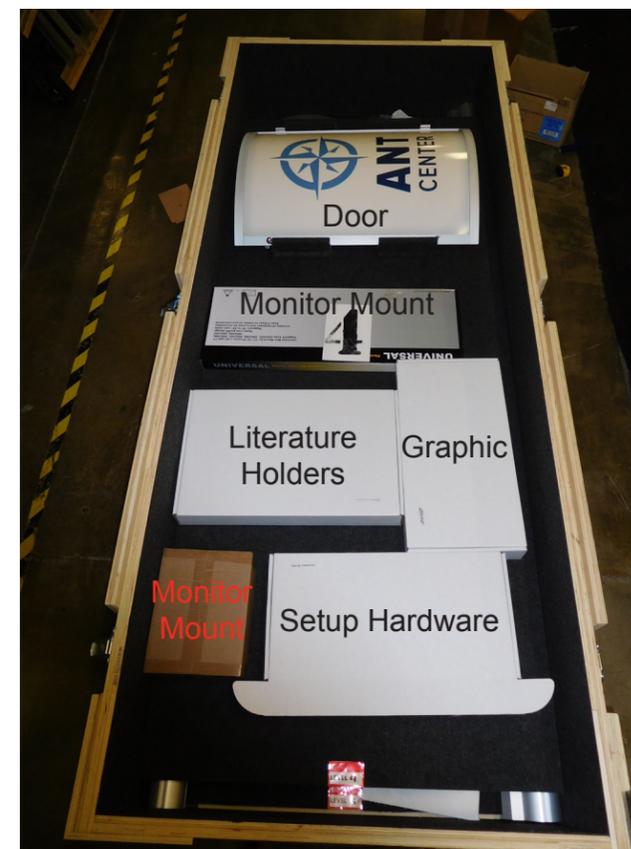

Level 4




Setup Hardware Box




Item	Qty.	Description
1	1	Base Plate
2	1	84" Vertical Extrusion
3	1	84" Vertical Extrusion
4	1	84" Vertical Extrusion
5	1	35" Mount Plate
5A/5B	1/1	28" Horizontal Extrusion
6A/6B	1/1	52" Horizontal Extrusion

Steps:

- 1) Attach Vertical Extrusion [4] to Base Plate [1], using bolt.
- 2) Attach Horizontal Extrusions [5,5A,5B] between Vertical Extrusions [2] and [3].
- 3) Attach Horizontal Extrusions [6A,6B] between Vertical Extrusions [3] and [4].
- 4) Attach Mount Plate [5] to Vertical Extrusions [2] and [3].
See [Mount Plate Attachment](#) detail.

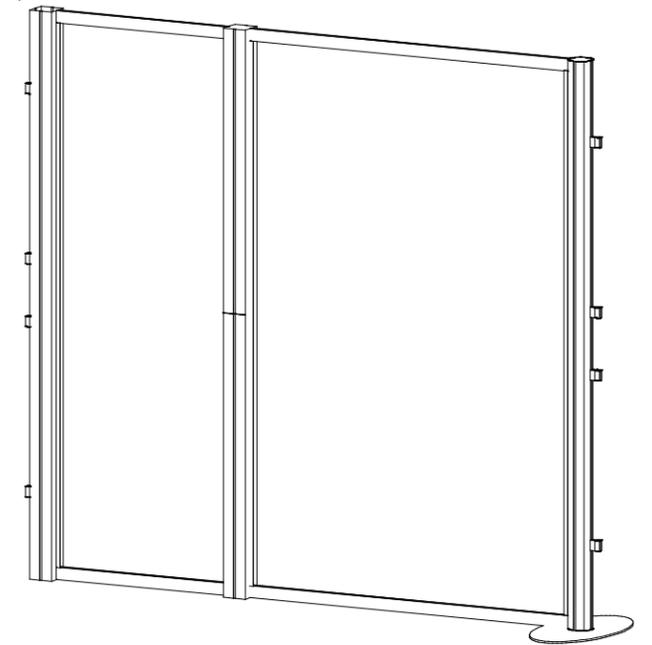

Completed Backwall Assembly


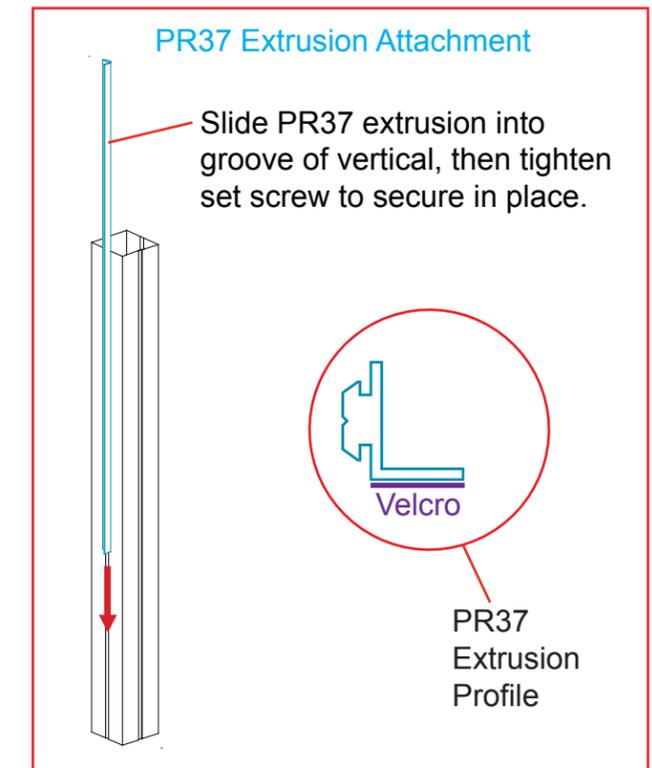
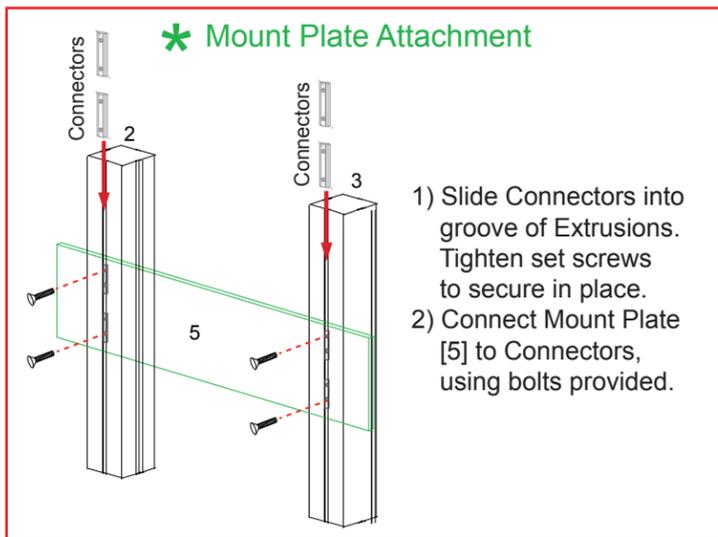
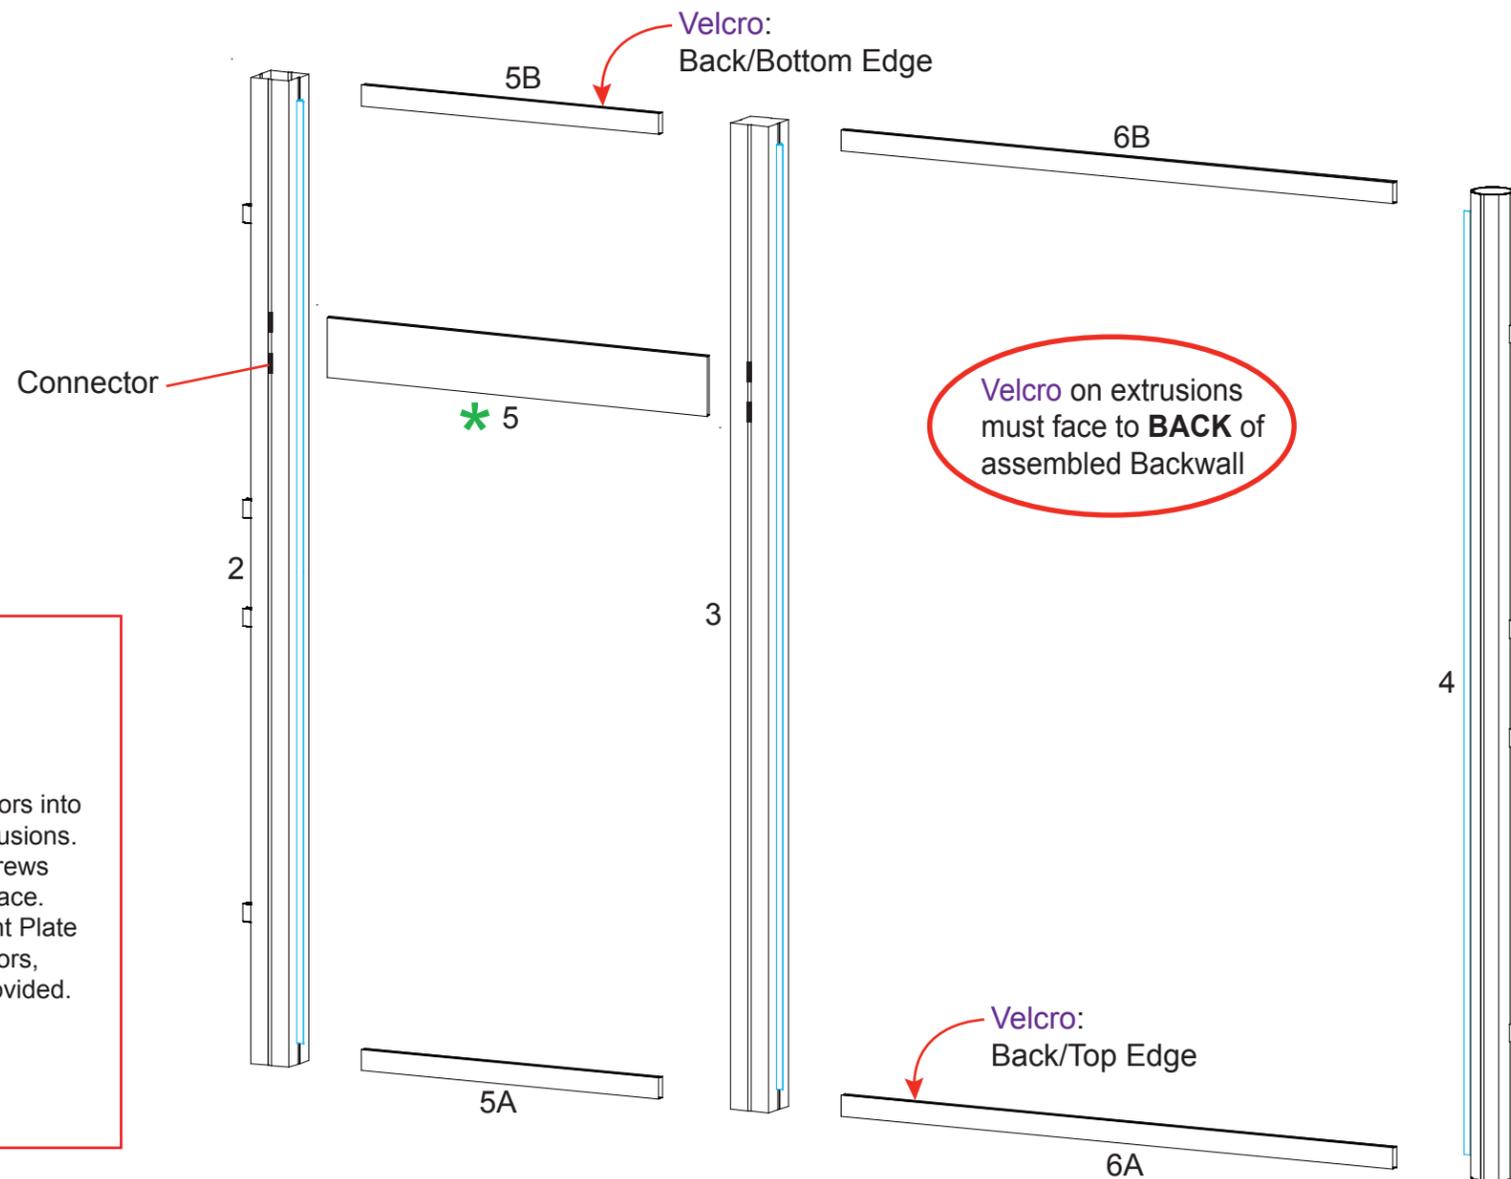


Item	Qty	Description
7/7A	1/1	38" Vertical Extrusion
8	1	38" 135° Corner Vertical Extrusion w/ Door Stopper
9	1	38" 135° Corner Vertical Extrusion w/ Door Hinges
10/10A	2/2	12.5" Horizontal Extrusion
11/11A	1/1	Curved Horizontal Extrusion

Steps

- 1) Attach lower Horizontal Extrusions [10] between Vertical Extrusions [2,7] and [3,7A].
- 2) Connect lower Curved Horizontal [11] between Verticals [8,9].
- 4) Connect assembled Door to Vertical Extrusion [9]. See [Door Connection](#) detail.
- 5) Side Infills between Vertical Extrusions [2,7] and [3,7A].
- 6) Attach upper Horizontal Extrusions [10A] and [11A] between Vertical Extrusions and on top of Infills & Door.
- 7) Connect **Shelf Supports** with Velcro to inside of Counter, then set Internal Shelf on top of supports.
- 8) Place Counter Top on top of assembled Backwall Counter. See [Counter Top Attachment](#) detail.

NOTE:
Vertical Extrusions 7/8 and 7A/9 stay assembled when packing & shipping.

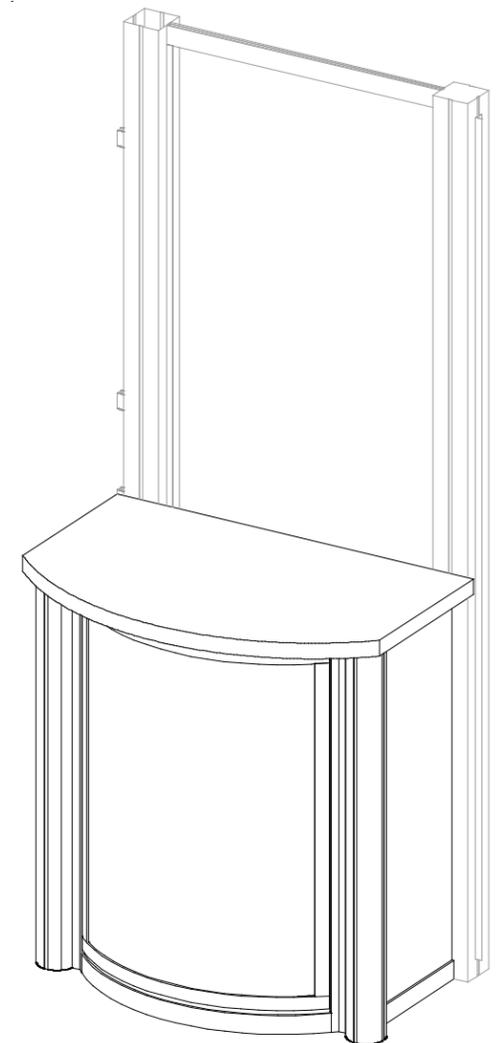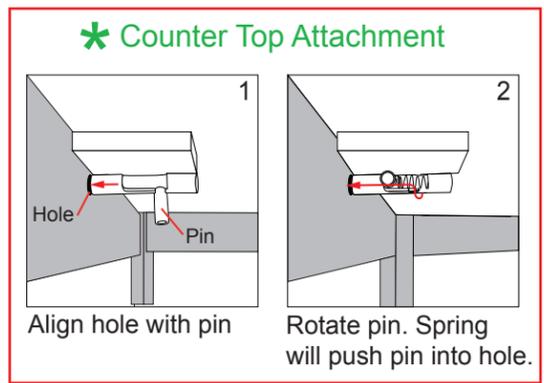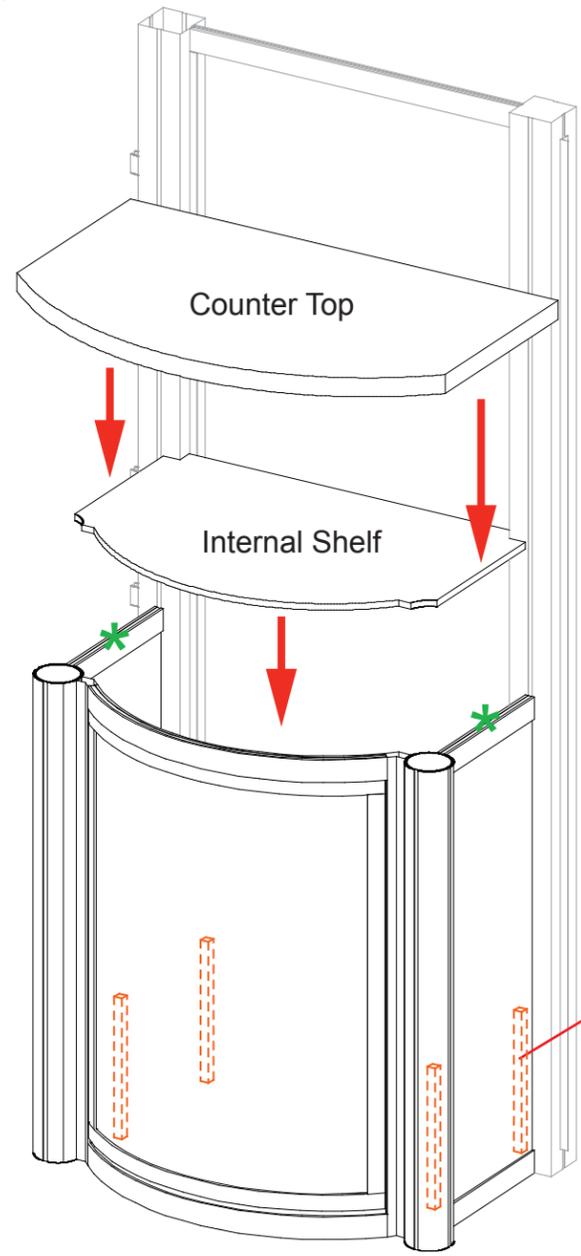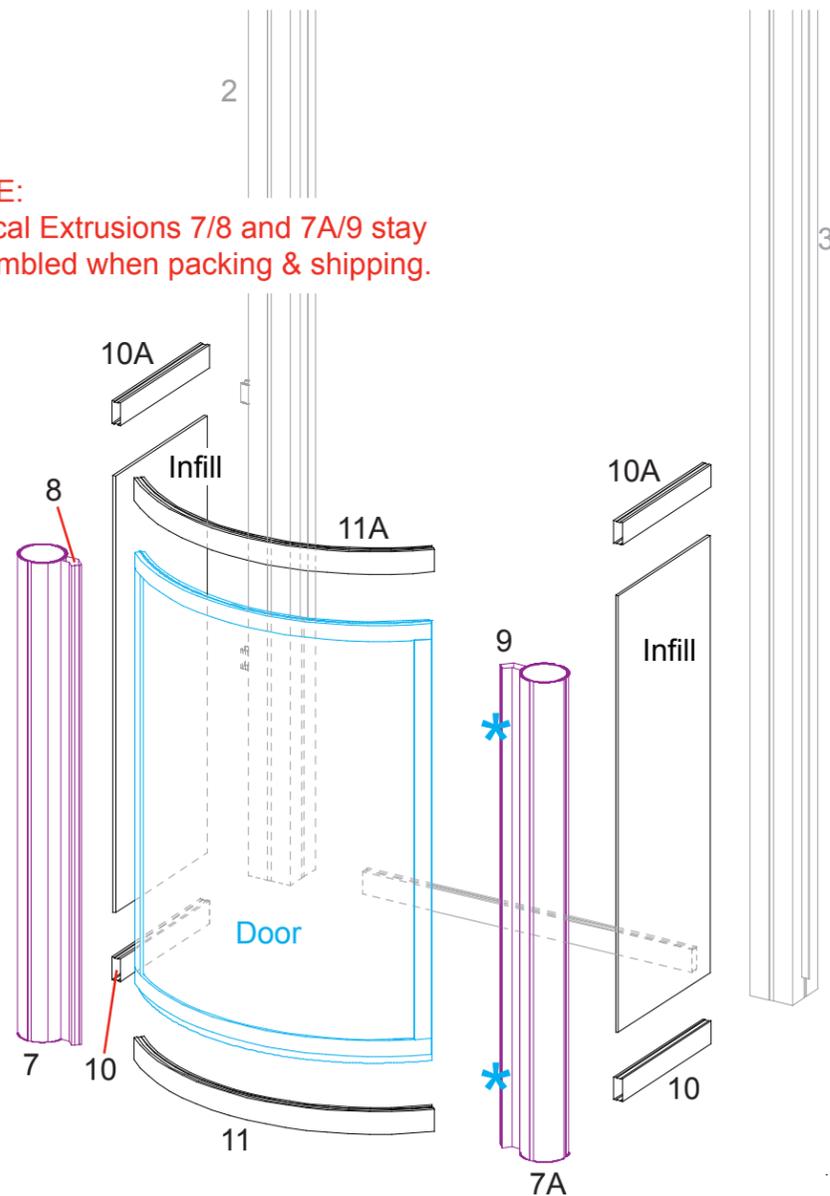







Completed Backwall Counter Assembly

Item	Qty	Description
12	2	5.862" Vertical Extrusion
13	1	80.638" Curved Horizontal Extrusion
14	1	78"w Horizontal Extrusion

Steps

- 1) Attach assembled Header to Ceiling, using screws and wing nuts. See **Header Attachment** detail.
- 2) Attach Ceiling to top of assembled Backwall, using screws.
- 3) Attach Wings to A10 Clamps. See **A10 Clamp** detail.
- 4) Attach Sign. See **Sign Attachment** detail.
- 5) Attach Literature Holders. See **Literature Holder Attachment** detail.
- 6) Attach Monitor Mount to [5]. See **Monitor Mount Attachment** detail.
- 7) Connect Header Graphic to Velcro on back of assembled Header.
- 8) Connect SEG Graphic to Velcro on back of assembled Backwall.

NOTE:
Extrusions [12/13/14] stay assembled when packing and shipping.

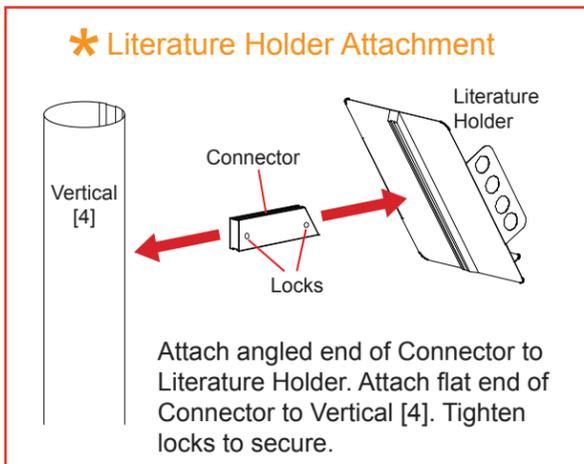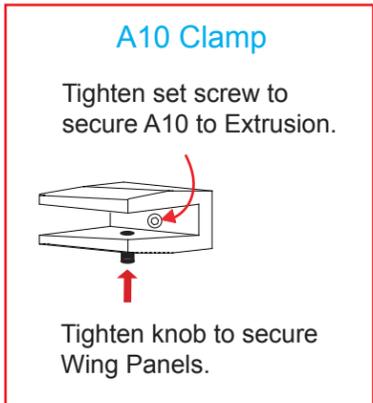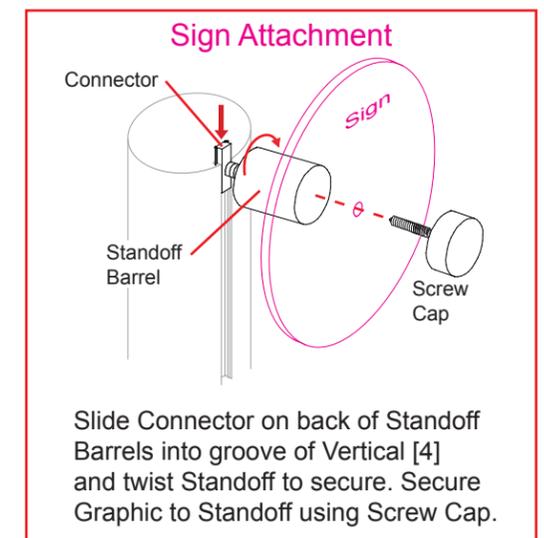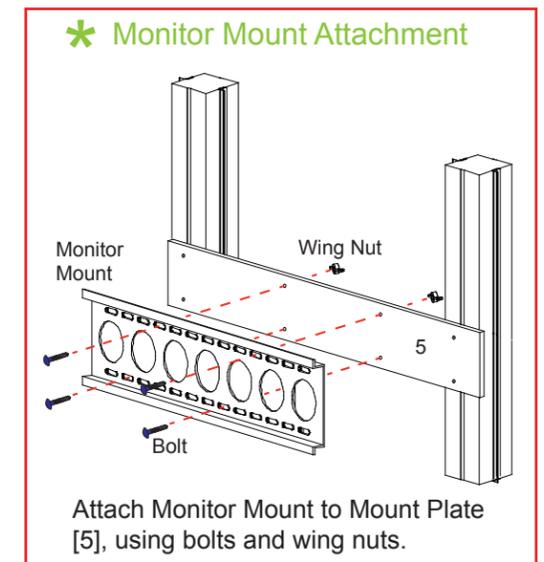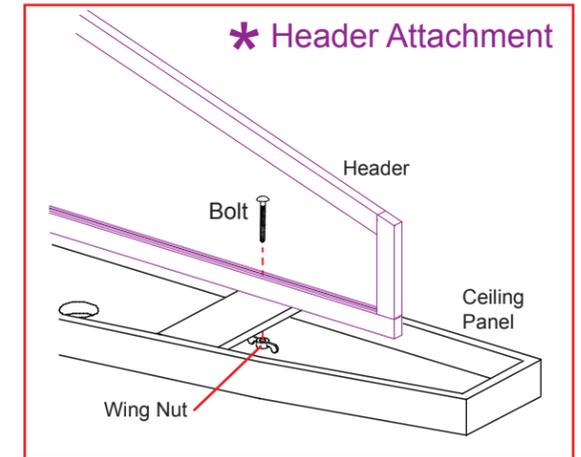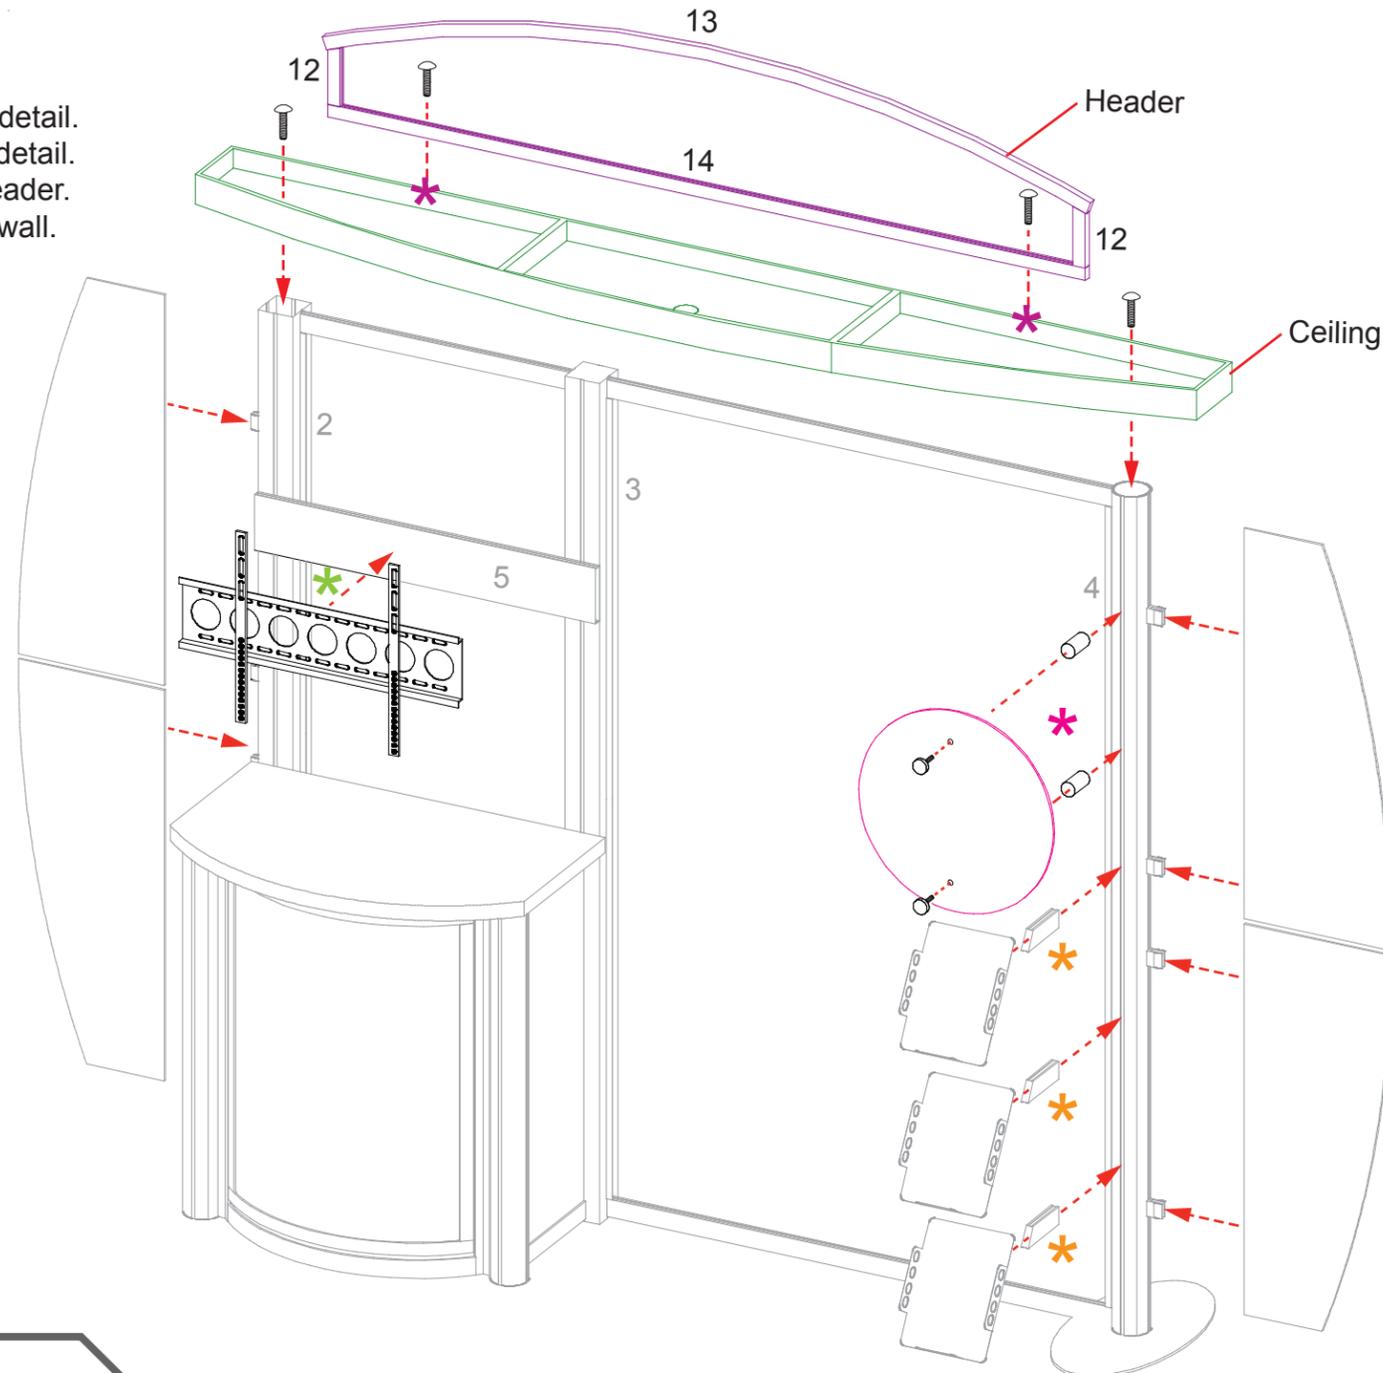

Item	Qty.	Description
1	1	Base Plate
2	1	80" Vertical Extrusion
3	1	36" Vertical Extrusion

Steps

- 1) Attach Vertical Extrusions [2] and [3] to Base Plate [1], using bolts.
- 2) Attach Wing to front of Vertical Extrusion [3], using Screw Caps.
- 3) Attach Counter Top to Vertical Extrusion [3].
- 4) Attach Monitor Mount to Vertical Extrusion [2], using screws.
See [Monitor Mount Attachment](#) detail.
- 5) Attach Sign to Vertical [2], using Stand-off Barrels and Screw Caps.
See [Sign Attachment](#) detail.

